

Multifunctional Bracket VB01

Milesight

◆ Description

- Support lintel mount
- Adjustable ceiling mount, allows installation of device when the ceiling height is outside of the recommended range
- Aluminium construction, rust-proof
- Swivel ball head mount (Tilt 90 degree, swivel 360 degree)
- Two color options available: white and black






◆ Specifications

Technical Data	
Applicable Models	VS125 & VS133(with adapter plate) & VS135
Adjustable Angle	Tilt 90°, Swivel 360°
Material	Aluminum
Color	Optional: White/Black
Extension range	Short Version: 0.4m~0.6m (Long Version Customizable: 2.05m~3m)
Weight	Bracket:
	Short Version: 420g (Long Version Customizable: 1083g)
	Adapter Plate: 126g (VS133 Only)
Included	4 × Mounting Screw Kits, 2 × L-shaped screwdrivers
Installation	Ceiling Mount, Lintel Mount

◆ Dimensions (mm)


Short Version:

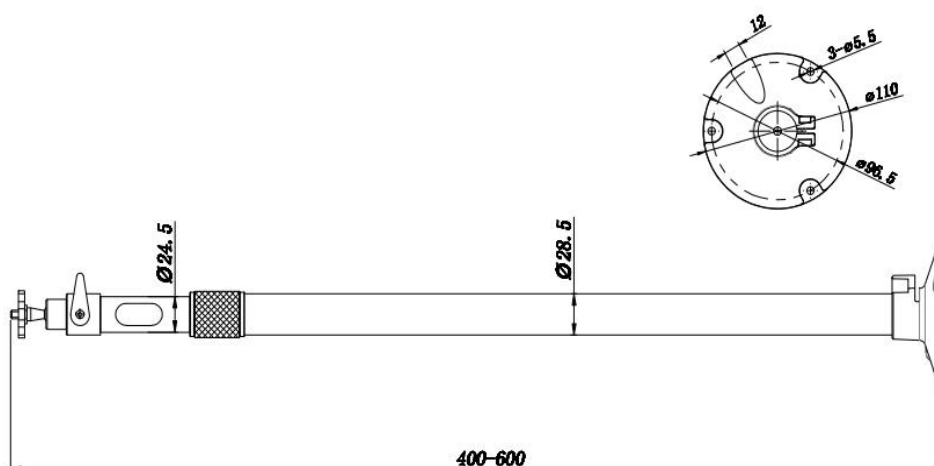

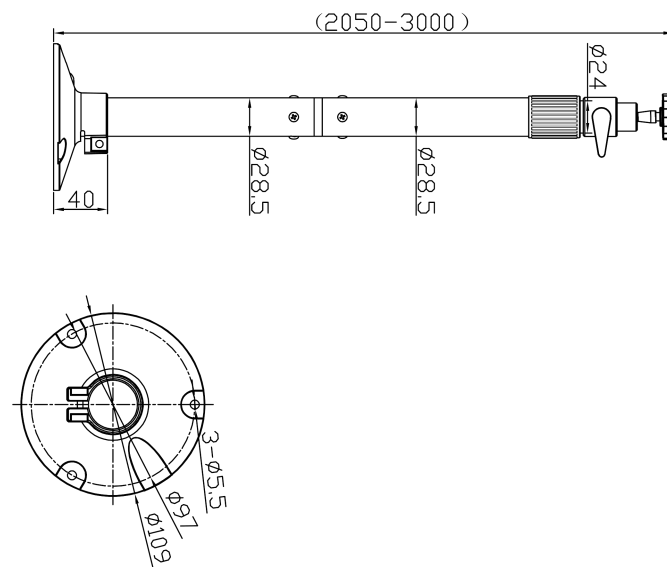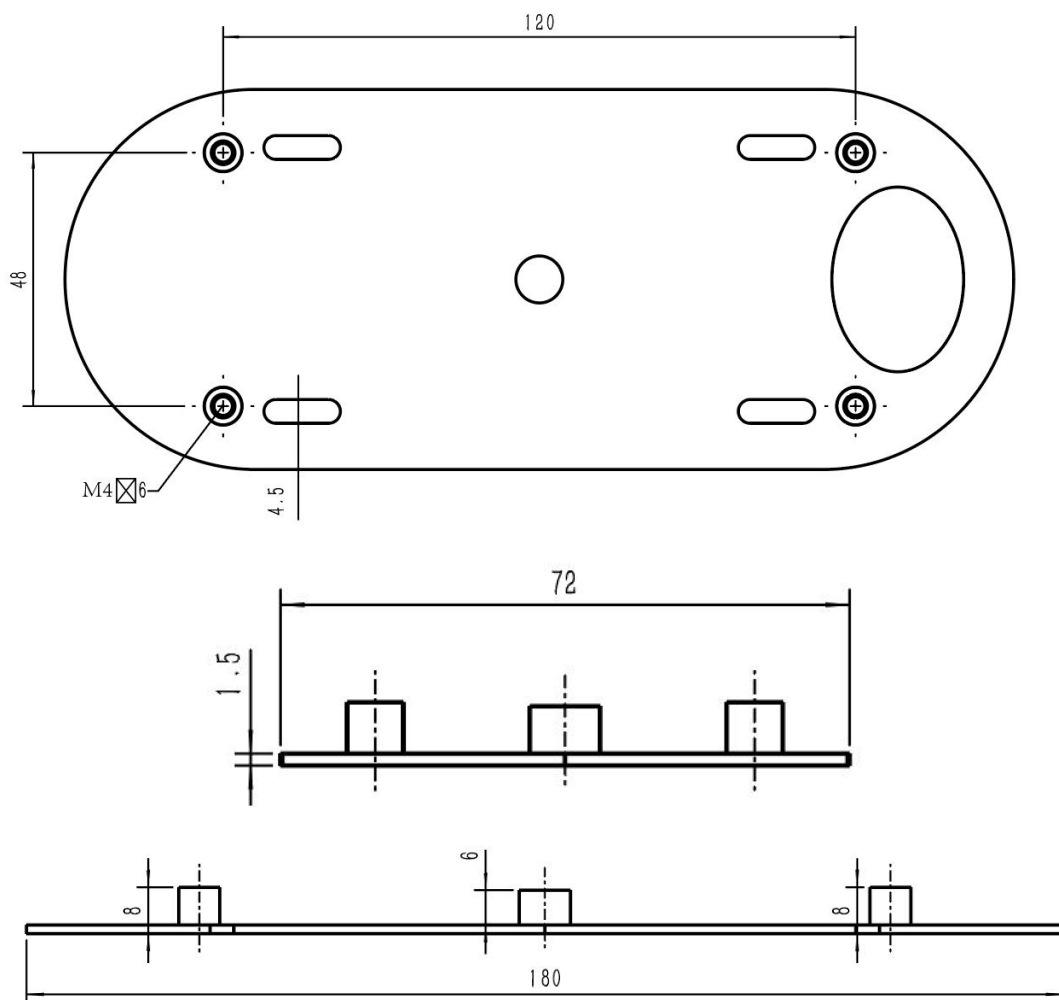
Long Version (Customizable):**Adapter Plate (VS133 Only):**

◆ HOW TO INSTALL


Step 1: Remove the cover on the device.

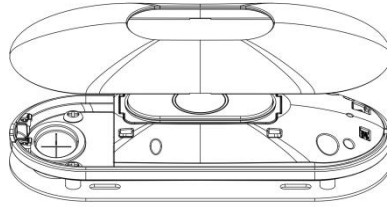


Step 2: For VS133 series, attach the adapter plate to the device using 4 screws. For other devices, please jump to the next step.




Step 3: Fix the pole to the device/adapter plate through the designated hole on the device/adapter plate.

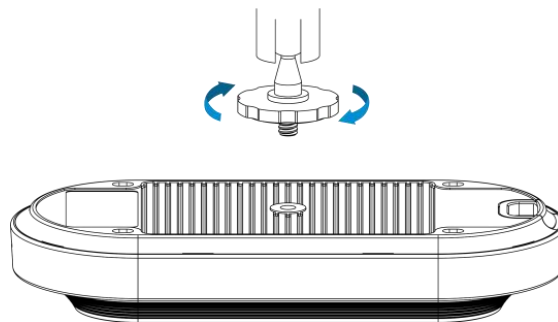


Step 4: Rotate the knob, then adjust the length of the pole.

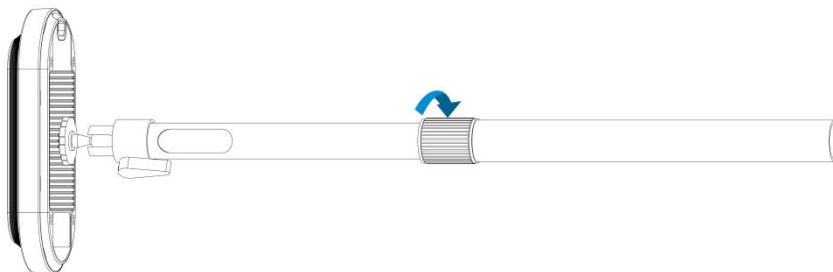

Step 5: Set the direction of 3-axis ball and tighten it with the handle.

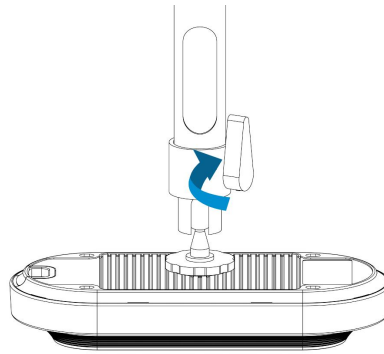


Step 6: Connect all required wires and pass them through the inside of pole, then put the cover back onto the device.

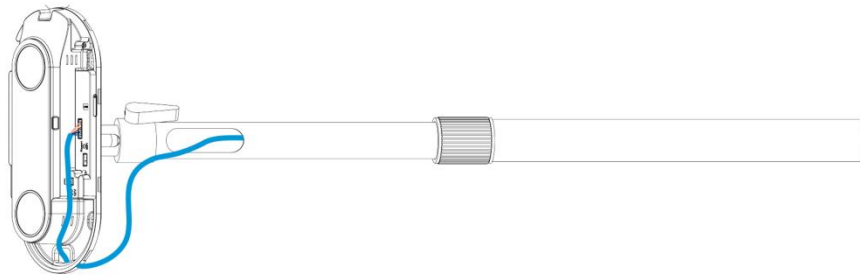


Step 7: Determine the mounting location and drill 3 holes, fix the wall plugs into the mounting holes, then fix the bracket base to the wall plugs via mounting screws.


(**Note:** If the wire needs to be extended to the interior of the ceiling or wall, a wire hole with a suitable size is also required to be drilled.)



Step 8: Fix the pole to bracket base with L-shaped screwdriver.

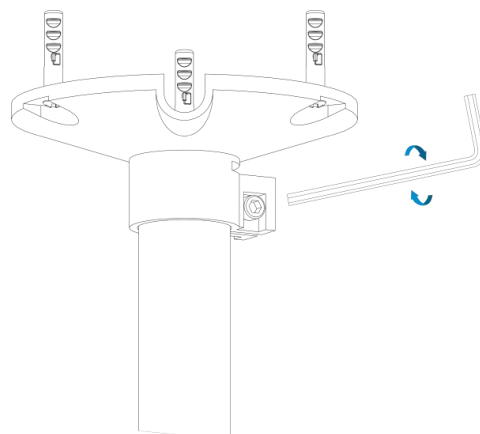

Ceiling Mount

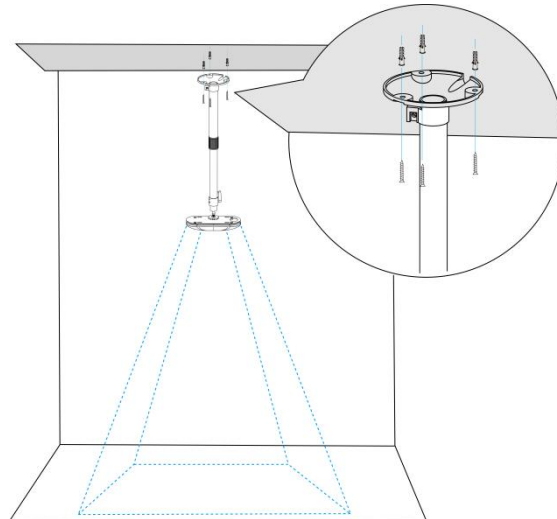

Lintel Mount

