

Milesight

NDAA

AI Motorized Pro Dome Network Camera



Motorized Lens

IP67 +IK10

DATASHEET



Key Features

- ▶ NDAA Compliance (The fully NDAA-compliant products are well suited for government, defense and a range of projects subject to the NDAA.)
- ▶ Precision Imaging Technology (Powered by P-Iris and a high-performance Day-Night Focus Lens to deliver stunning image clarity.)
- ▶ 140dB Super WDR (Excellent performance even when the ratio of the luminosity of brightest and darkest is up to 140dB.)
- ▶ Up to 4K@60fps (Camera can easily capture fast-moving objects smoothly with no latency.)
- ▶ Hybrid Zoom (Combines optical and digital zoom to capture detailed images.)
- ▶ 1TB Edge Storage (Supports external microSD/SDHC/SDXC cards up to 1TB for ultra-large on-device storage.)
- ▶ Versatile Interfaces (Integrates DC 10V~28V power, PoE, audio, and alarm interfaces neatly within the base, making it adaptable to various environments.)

Smarter Detection, Greater Accuracy

Focused on person and vehicle classification using deep learning, the full suite of AI VCA 2.0 delivers ultra-low false alarm rates, supports longer-range detection, and ensures robust physical security. Meanwhile, MSense is purpose-built to address diverse vertical applications, delivering tailored intelligence and enhanced adaptability.




Crystal-Clear Video Streaming

Delivers 4K ultra-high-definition resolution at up to 60fps, and supports Digital Image Stabilization (DIS) for smooth, stable video. Quad-Stream reduces bandwidth and storage usage while dedicating each stream for recording, live view, mobile access, or AI processing.



Superior Low-light Performance

Equipped with a Sony STARVIS 2, 1/1.8" large sensor and Day-Night Focus Lens, the camera delivers ultra-clear, superior images down to 0.0008Lux@F1.2 (Color). Powered by AI ISP, it further enhances image quality by reducing noise and improving clarity in the darkest environments.

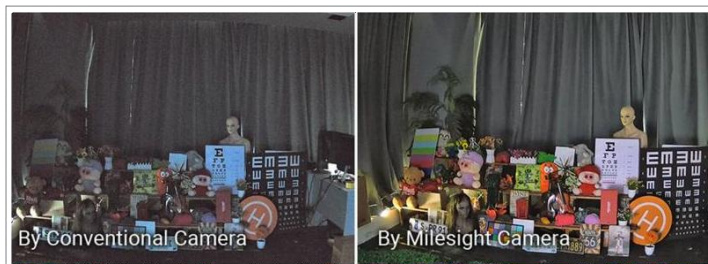

Efficient & Simple Installation

Aiming to reduce the installation troubles to the least, the clamshell design is creatively introduced to the dome base. This revolutionary innovation enlarges the space to make cable connection a piece of cake, greatly saving efforts for installers.



AI Motorized Pro Dome Network Camera



	Model	MS-C4472-RFIPG1 (4MP)	MS-C8272-RFIPG1 (C) (4K)
Camera	Image Sensor	1/1.8" Progressive Scan CMOS	
	Min. Illumination	Color: 0.001Lux@F1.2, B/W: 0.003Lux@F1.2 0Lux with IR on	Color: 0.0009Lux@F1.2, B/W: 0.0004Lux@F1.2 0Lux with IR on
	WDR	140dB Super WDR	120dB Super WDR
	Shutter Time	1/1000000s~1/3s	
	DORI Distance	D: 69.3m ~ 149m O: 27.3m ~ 58.7m R: 13.6m ~ 29.3m I: 6.9m ~ 14.7m	D: 98.5m ~ 212m O: 38.8m ~ 83.4m R: 19.4 ~ 41.7 I: 9.7m ~ 20.8m
	Day/Night Mode	Day / Night / Auto / Customize / Schedule	
	S/N	>55dB	
Illuminator	Illuminator Number	3	
	IR Wave Length	850nm	
	Illumination Distance	Up to 60m	
	Illuminator Control	Auto, Manual	
Lens	Lens	Motorized 2.8mm~12mm@F1.2	
	Field of View	H111.6° ~ H47.5° / D129.4°~D54.5° / V58.8° ~ V26.7°	H115.3° ~ H46.8° / D122.6° ~ D53.9°/V55.6°~V26.2°
	Close Focus Distance	W: 1m, T: 1.5m	
	Camera Angle Adjustment	Pan: 0°~355°, Tilt: 0°~80°, Rotation: 0°~355°	
	Mount	Φ17	
	Focus Control	Auto / Manual	
	Optical Zoom	4x	
	Aperture	Max.F1.2	
	Iris Type	P-Iris	
	Iris Control	Auto / Manual	
Video	Max. Image Resolution	2688x1520	3840x2160
	Primary Stream	60Hz: 60fps@(2688x1520, 2304x1296, 1920x1080, 1280x720, 704x480, 640x480, 352x240) 50Hz: 50fps@(2688x1520, 2304x1296, 1920x1080, 1280x720, 704x480, 640x480, 352x240)	60Hz: 60fps@(3840x2160, 3200x1800, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x480, 640x480, 352x240) 50Hz: 50fps@(3840x2160, 3200x1800, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x480, 640x480, 352x240)
	Secondary Stream	60Hz: 60fps@(704x576, 640x480, 640x360, 352x240), 50Hz: 50fps@(704x576, 640x480, 640x360, 352x240)	
	Tertiary Stream	60Hz: 30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 352x240) 50Hz: 25fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 352x240)	
	Quaternary Stream	60Hz: 10fps@(1280x720), 30fps@(704x576, 640x480, 640x360, 352x240) 50Hz: 10fps@(1280x720), 25fps@(704x576, 640x480, 640x360, 352x240)	
	Video Compression	H.265+/H.265(HEVC)/H.264+ / H.264H/H.264B/H.264/MJPEG	
	Video Bit Rate	16Kbps ~ 16Mbps (CBR/VBR Adjustable)	

AI Motorized Pro Dome Network Camera



Image	AI ISP	NA	Support
	Privacy Masking	Up to 8 Areas (Mask Area and Mosaic Area are included)	
	ROI	Up to 8 Areas	
	Motion Detection	Up to 4 Areas (sensitivity, threshold adjustment and schedule)	
	Image Setting	Brightness/Contrast/Saturation/Sharpness/Gamma	
	Image Rotation	Off, Rotating 180°, Flip Horizontal, Flip Vertical, Clockwise 90°, Anticlockwise 90°	
	Image Enhancement	BLC, HLC, 2D DNR, 3D DNR, AGC, Defog, AWB, Deblur, Anti-flicker, LDC, DIS	
	Exposure & White Balance	Supports shutter adjustment, gain adjustment, and white balance settings Color, Auto, and B/W modes with automatic day/night switching	
	OSD Overlay	Provides overlay of date, time, and text on the video stream, with three (3) additional user-configurable text fields.	
Network	Hybrid Zoom	Up to 32X	
	Network Storage Protocol	NAS (Support NFS, SMB/CIFS), ANR IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, LLDP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, VPN, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL, TLS 1.2, Unicast and Multicast	
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port	
	Audio I/O	1/1	
	Alarm I/O	1/1 (Alarm Input: 5mA 5V DC, Alarm Output: 300mA 12V DC)	
Audio	Audio Compression	G.711/AAC/G.722/G.726	
	Audio Sampling Rate	8/16/32/44.1/48KHz	
	Audio Bit Rate	16~256kbps	
Intelligent Analytics	Video Analysis	VCA 2.0: Intrusion Detection, Region Entrance, Region Exiting, Advanced Motion Detection, Line Crossing, Loitering, Object Left, Object Removed, Parking Detection, Crowd Detection Simultaneously detect up to 50 targets and capture humans and vehicles in real time.	
	Attribute Extraction	Recognize attributes including Upper and Lower Clothing Color, Hat, and Vehicle Types (Bicycle, Car, Motorcycle, Bus, Truck, E-scooter).	
	Face Detection & Face Attribute Recognition	Detect and capture faces, providing real-time snapshots and facial metadata transmissions. The attributes include Age, Gender, Glasses, Mask, Cap and Facial Expressions.	
	Object Counting & Report	Count the number of objects crossing the line, optionally human and vehicle. Support regional people counting for up to 4 detection areas (Entry and Exit).	
	Heat Map	The built-in statistical behavior analysis enables you to identify the busiest areas within the environment.	
	Sound Classification	Supports recognition of Gunshot, Glass Break, and Screaming with instant alarm triggering.	
	Hard Hat Detection	Detect whether individuals are wearing safety hats. Trigger an alarm when a person is identified without a hard hat.	
	Privacy Protection	Automatically detect faces or human bodies in the video stream and overlay mosaic effects. Supported on Primary Stream/Secondary Stream, Compatible with H.265/H.264 formats.	
	Fall Detection	Detect a person's fall and trigger an alarm to alert others for timely assistance.	
	Violence Detection	Identify violent behavior and trigger an alarm to alert others to intervene or prevent the action.	

AI Motorized Pro Dome Network Camera




Event	One-Click Disarm	Support
	Alarm Management	Online Alarm Log, Motion Detection Events, Video Tampering Events, Audio Alarm Events.
	Basic Event	Motion Detection, Tamper Detection, Audio Alarm, External Input, External Output, etc.
	Exception	Network Disconnection, IP Address Conflict, Record Failed, SD Card Full, SD Card Uninitialized, SD Card Error, No SD Card, etc.
	Event Action	FTP Upload Record ¹ , SMTP Upload Record (up to 3 destinations), SD Card Record, Snapshot, Play Audio, SIP Phone, HTTP Notification, etc. Scheduling is available for each of these events.
System	Watermark	Support
	Mobile Client	Supports live view, playback, and device management through manufacturer-provided mobile applications for iOS and Android.
	Security & Management	Access Control, Password Authentication, IP Address Filtering, Internet Explorer Compatibility, Web-Based Firmware Upgrade, HTTPS Encryption, User Permission Management, Security Event Logging, Configuration Backup & Restore.
	Storage	Support Micro SD/SDHC/SDXC Card Local Storage, up to 1TB
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	System Compatibility	ONVIF Profile G & M & S & T, One API
General	Working Temperature	-40°C~60°C
	Working Humidity	0~95% RH (Non-condensing)
	Web Interface	Supports image viewing and configuration via web browser IE, Firefox, Chrome, Safari and others Languages: Chinese, English, Spanish, Portuguese, Korean and 19 others
	Power Supply	PoE (802.3af) / DC 10V~DC 28V
	Power Consumption	Min.: 3.3W (DC), 4.3W (PoE)
		24 Hour Average: 4.5W (DC), 5.6W (PoE)
		Max.: 8.6W (DC), 10.4W (PoE)
	Surge Protection	6KV
	Net Weight	Approx. 1.3kg
	Gross Weight	Approx. 1.6kg
	Dimensions	Φ143mm X 108.4mm
	Warranty	3 Years / 5 Years (Optional)
Certifications	EMC	CE-EMC (EN 55032, EN 55035), FCC (PART 15B)
	Safety	CE-LVD (EN IEC 62368-1)
	Environment	CE-ROHS (Directive (EU) 2015/863 amending 2011/65/EU)
	Protection	IP67, IK10

¹Support automatic upload of snapshots and video recordings to an FTP server based on configurable event triggers, including motion detection

AI Motorized Pro Dome Network Camera



Structure Diagrams

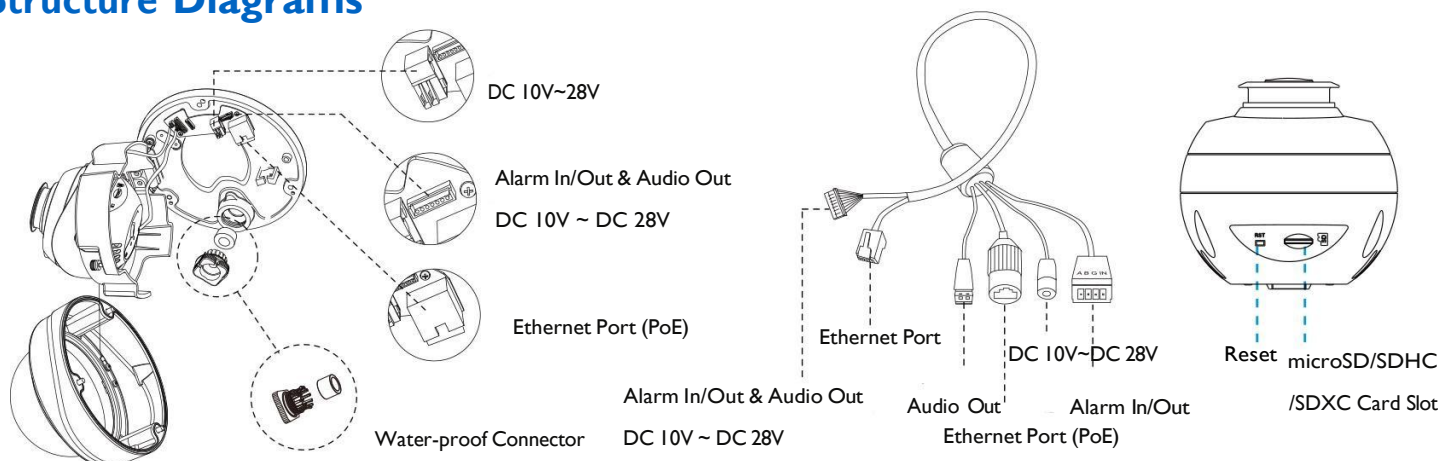


Note: The cable is connected with the interface board by default.

Units: mm



Accessories Support

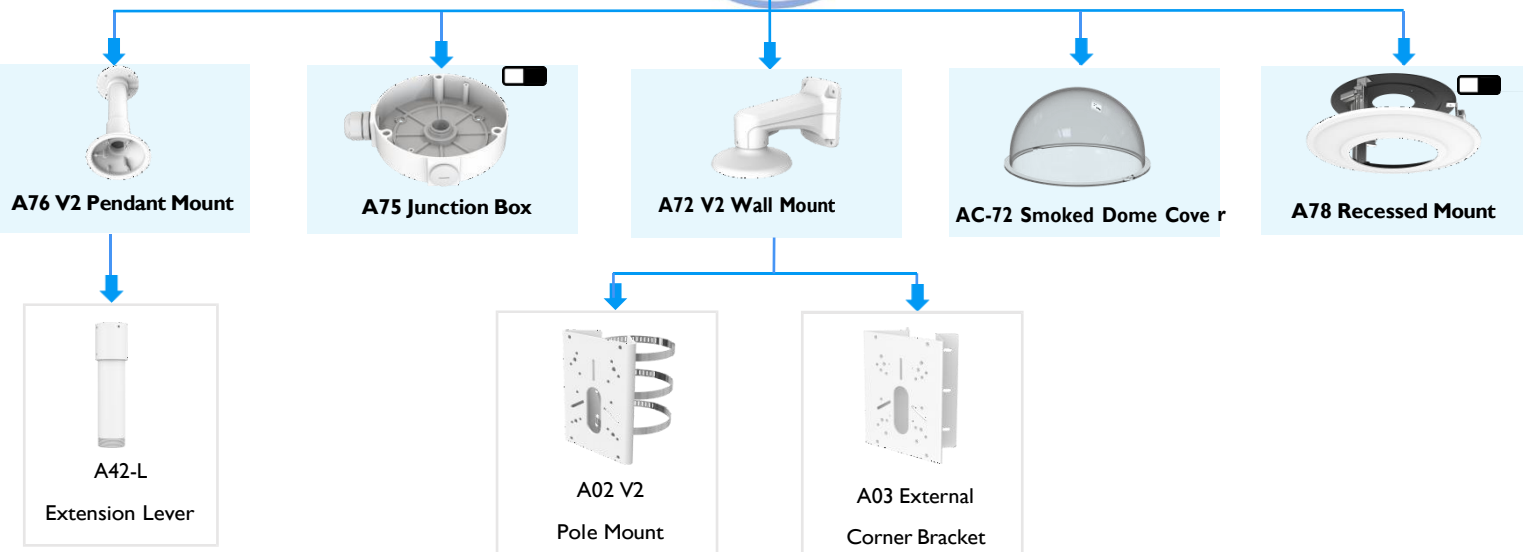

Milesight | www.milesight.com/security

Contact Us: sales@milesight.com support@milesight.com

Add: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China
Tel: +86-592-5922772

