


# 4K H.265 Mini PoE NVR 1000 Series

4K+H.265

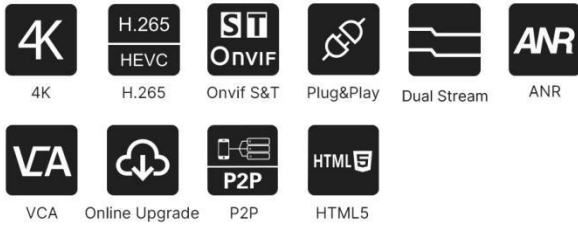

**DATASHEET**

## KEY FEATURES

- ▶ 4/8-CH Input & 4\*PoE Ports (4/8 channel are supported, and PoE ports design provides just one step to connect.)
- ▶ H.265+ (H.265+ allows to cut down 70%~80% bandwidth while ensuring the high quality of images compared with H.264.)
- ▶ Dual Stream Recording (Supporting Primary Stream and Secondary Stream recording simultaneously.)
- ▶ HTML5 Streaming Ready (Support previewing the video via all major browsers without plug-in when Video Codec is set to H.265.)
- ▶ Auto Backup (The latest 24 hour's video will be automatically backed up to USB port devices or NAS after setting up the backup.)
- ▶ Versatile Interfaces (A whole array of ports provides all necessary features for effective surveillance.)


### Power Decoding Capacity & Flexible Storage Options

- The 4K NVR is equipped with solid 4K decoding and display capabilities and maximum supports simultaneous viewing of 4\*1080P or 8\*720P network cameras.
- Providing flexible storage options including HDD and NAS to address the needs for versatile storage.



### Reliability

- ANR can store video data on the camera storage card when network between IPC and NVR is disconnected and retransfer the recorded video to NVR after network recovers.

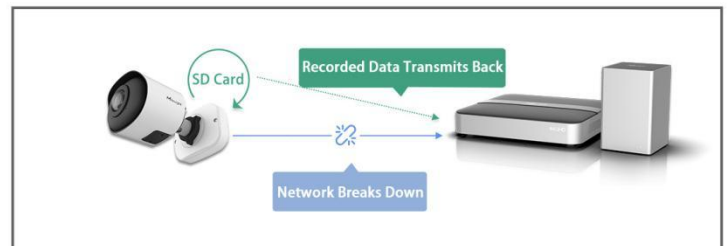


### AI Video Analytics & POS Integration

- All-in-one to Manage AI: VCA Function focus on human and vehicle detection. People Counting provides high-accuracy data and statistic reports.
- POS machine information can be transferred to and displayed on the NVR.



### Ultra Mini Size & Thermal Design

- Ultra-mini size offers a compact design without compromising functionality, providing an easier way to ensure high-quality video management.
- The metal panel on the bottom of the NVR dissipates the heat effectively and the ventilation holes on the side and bottom panels maximize airflow and carry heat away.

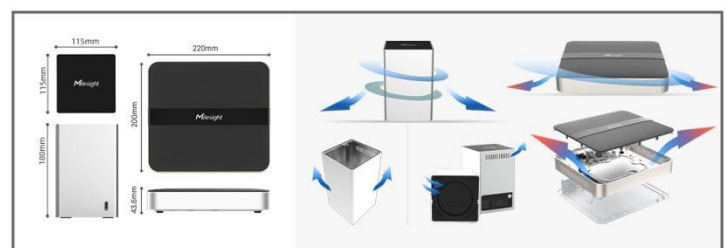

# 4K H.265 Mini PoE NVR 1000 Series



Model		MS-N1004-UPC-AL	
Video/Audio Input	Network Video Input	4-CH	
	Bandwidth	Incoming	40Mbps
		Outgoing	40Mbps
Video/Audio Output	HDMI Output	1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60H, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	Dual Stream	Support	
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	
	Synchronous Playback	1*(30fps @12MP), 1*(30fps @8MP), 1*(30fps @5MP), 2*(30fps @4MP), 2*(30fps @3MP), 4*(30fps @1080P), 4*(30fps @720P)	
Video/Audio Compression	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264	
	Audio Compression	G.711/AAC/G.722/G.726	
	Sample Rate	8KHz/16KHz	
Storage	SATA	1*SATA HDD(3.5")	
	Capacity	Up to 10TB capacity for each HDD	
Recording Management	Recording Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)	
	Snapshot Type	N/A	
	Playback Type	General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback	
Backup	Backup	Video Backup, Image Backup	
Network	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface	1*RJ45 10/100Mbps	
	USB Interface	1*USB 3.0 & 2*USB 2.0	
PoE Interface	Interface	4*RJ45 10/100Mbps	
	Power Output	≤50W	
	Supported Standard	IEEE 802.3af/at	
General	Compatibility	ONVIF, API	
	Advanced Function	ANR	
	ANPR	N/A	
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, People Counting, Object Left, Object Removed	
	Keyboard Control	Milesight Keyboard (MS-K01)	
	Power Supply	DC 48V 1.3A	
	Consumption	≤3.5W(Without HDD, without enabling	
	Working Conditions	Temperature: -10°C~55°C/Humidity: 10%~90%	
	Dimensions	220mm(W)X200mm(D)X43.6mm(	
	Weight	0.2Kg	
	Warranty	3/5 Years	



## Interfaces


MS-N1004-UC/ MS-N1008-UC



- 1. LED Indicator
- 2. USB
- 3. HDMI
- 4. LAN
- 5. Power
- 6. Reset
- 7. Power Button

## Structure Diagrams

MS-N1004-UC/ MS-N1008-UC

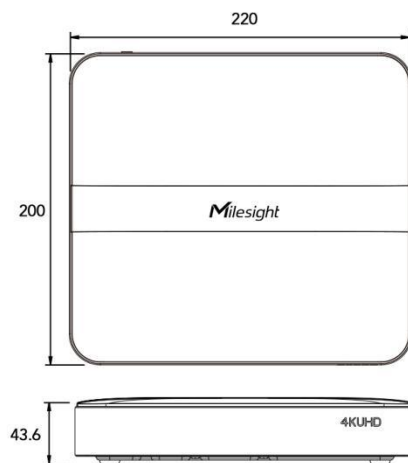

Units: mm

## Naming Convention

