


Milesight

4K PoE NVR 5000 Series


NDA A

4K

PoE

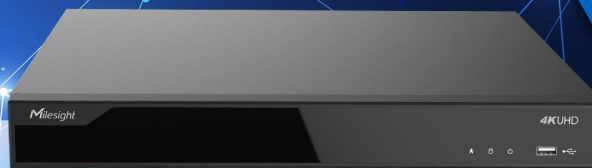

DATASHEET

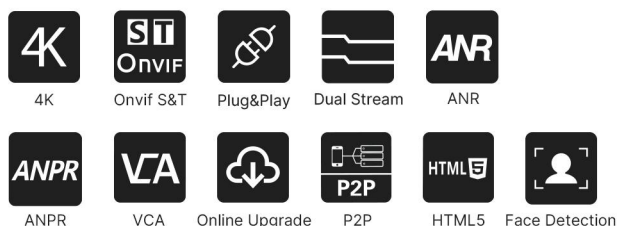


KEY FEATURES

- ▶ NDA A Compliance (The fully NDA A-compliant products are well suited for government, defense and a range of projects subject to the NDA A.)
- ▶ 8/16-CH Input & 8/16*PoE Ports (8/16 channels are supported, and PoE ports design provides just one step to connect.)
- ▶ Dual Stream Recording (Supporting Primary Stream and Secondary Stream recording simultaneously.)
- ▶ Auto Backup (The latest 24 hours' video will be automatically backed up to USB Port Devices or NAS after setting up the backup.)


Power Decoding Capacity & Flexible Storage Options

- The 4K NVR is equipped with solid 4K decoding and display capabilities and maximum support simultaneous viewing of 6*1080P or 12*720P network cameras.
- Providing flexible storage options including HDD and NAS to address the needs for versatile storage.

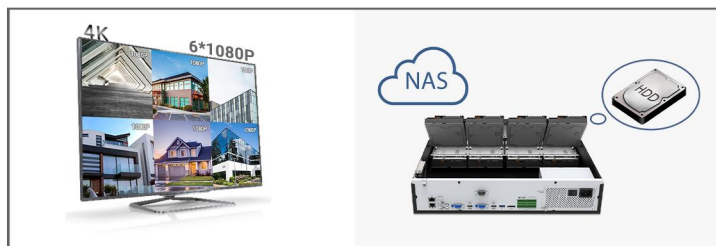


Reliability

- ANR can store video data on the camera storage card when network between IPC and NVR is disconnected and retransfer the recorded video to NVR after network recovers.

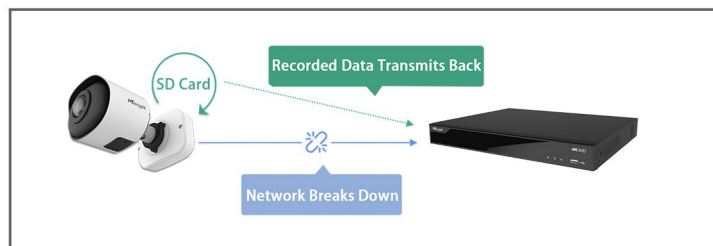


AI Video Analytics & POS Integration

- All-in-one to Manage AI & ANPR:
VCA Function focus on human and vehicle detection.
People Counting provides high-accuracy data and statistic reports.
Face Detection function supports attribute recognition.
Enterprise ANPR Management makes it easy to monitor traffic.
- POS machine information can be transferred to and displayed on the NVR.

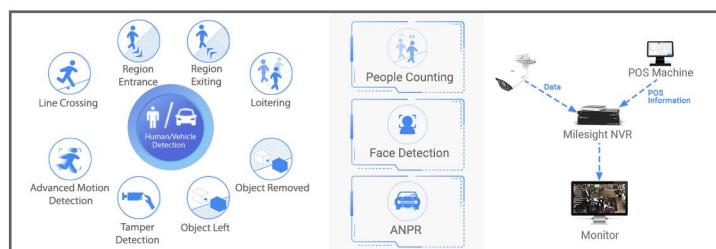

Flexible Structure

- U-Rack Standard supported.
- A whole array of ports provides all necessary features for effective surveillance.

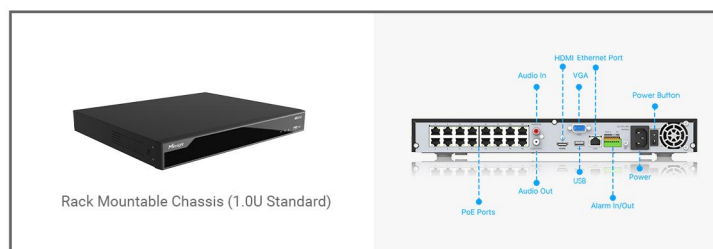



Model			MS-N5008-PE	MS-N5008-NPE	MS-N5016-NPE
Video/Audio Input	Network Video Input		8-CH		16-CH
	Bandwidth	Incoming	80Mbps	160Mbps	160Mbps
		Outgoing	50Mbps	160Mbps	160Mbps
Video/Audio Output	HDMI Output		1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output		
	VGA Output		1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz		
	Dual Stream		Support		
	Recording Resolution		8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF		
	Synchronous Playback		*The recommended parameters are theoretical values only. Actual performance may vary depending on the usage environment, the number of connected cameras, and their models. 1*(30fps @8MP), 2*(30fps @6MP), 2*(30fps @5MP), 3*(30fps @4MP),4*(30fps @3MP),6*(30fps @1080P), 8*(30fps @720P) 3*(30fps @8MP), 4*(30fps @6MP),4*(30fps @5MP), 6*(30fps @4MP),8*(30fps @3MP), 8*(30fps @1080P),8*(30fps @720P) 3*(30fps @8MP), 4*(30fps @6MP),4*(30fps @5MP), 6*(30fps @4MP),8*(30fps @3MP), 12*(30fps @1080P),16*(30fps @720P),16*(30fps @D1)		
Video/Audio Compression	Video Compression		H.264*/H.264		
	Audio Compression		G.711/AAC/G.722/G.726		
	Sample Rate		8KHz/16KHz		
Storage	SATA		2*SATA HDD(3.5")		
	Capacity		Up to 10TB capacity for each HDD		
Recording Management	Recording Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Snapshot Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Playback Type		General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback		
Backup	Backup		Video Backup, Image Backup		
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS		
External Interface	Network Interface		1*RJ45 10/100/1000Mbps		
	USB Interface		2*USB 2.0		
	Audio Input/Output		1*RCA/1*RCA		
	Alarm Input/Output		4-CH/1-CH		
PoE Interface	Interface		8*RJ45 10/100Mbps		16*RJ45 10/100Mbps
	Power Output		≤200W		
	Supported Standard		IEEE 802.3af/at		
General	Compatibility		ONVIF, API		
	Advanced Function		ANR		
	ANPR		Support		
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, People Counting, Object Left, Object Removed		
	Keyboard Control		Milesight Keyboard (MS-K01)		
	Power Supply		AC 100V~240V 50Hz~60Hz		
	Consumption		≤9W(Without HDD, without enabling PoE)	≤7.5W(Without HDD, without enabling PoE)	≤8.5W(Without HDD, without enabling PoE)
	Working Conditions		Temperature: -10℃~55℃ / Humidity: 10%~90%		
	Dimensions		Rack Mountable Chassis (1.0U Standard) 380mm(W)X317.6mm(D)X51.8mm(H)		
	Weight		2.6Kg	2.7Kg	2.7Kg
	Warranty		3/5 Years		




Interfaces


MS-N5008-PE /MS-N5008-NPE /MS-N5016-E



MS-N5008-PE /MS-N5008-NPE

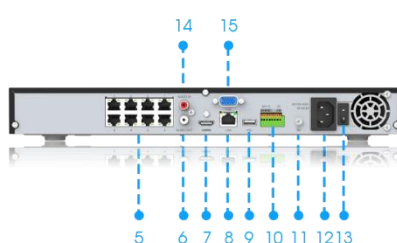


MS-N5016-E

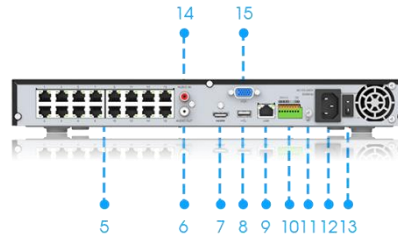

- | | | | | | | | |
|------------------|------------------|--------------------|-----------|------------------|--------------|---------|--------|
| 1. Run Indicator | 2. HDD Indicator | 3. Power Indicator | 4. USB | 5. PoE Ports | 6. Audio Out | 7. HDMI | 8. USB |
| 9. Ethernet Port | 10. Alarm In/Out | 11. GND | 12. Power | 13. Power Button | 14. Audio In | 15. VGA | |

Structure Diagrams

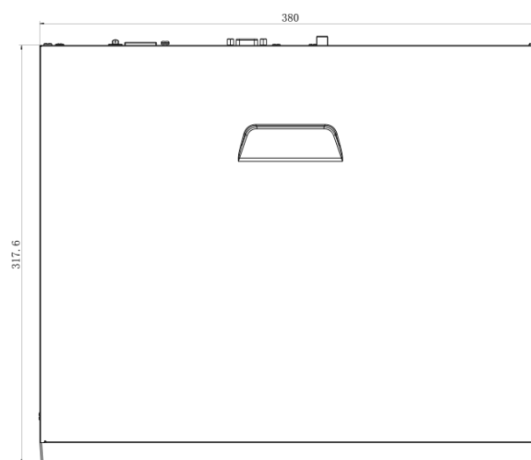

Naming Convention

Units: mm

MS-N	5	008-	PE
	2*3.5"HDD	008--8-CH (016--16-CH)	PoE+AI Series

